

ESWOOD

The professionals in integrated glass and dishwashing systems



ESTABLISHED 1932
ESWOOD
PROUDLY AUSTRALIAN MADE

• 'CI-3B' •

Professional Glass Washing System

1800 Glasses per Hour • Ideal for Hotel, Club and Public Bars

• 'CI-3B' Professional Glass Washing System •

Built in Accordance with Australian Health Authority Regulations

Big Performance in a Super Compact Size:

The Eswood 'CI-3B' glass washer fits easily on the bench-top or under-bar and provides fast turnaround of up to 1800 glasses per hour. The internal wash chamber has a vertical clearance of 234mm to easily cater for standard beer jugs or up to thirty 285ml glasses in a 17" x 14" basket. The 'CI-3B' will accommodate a variety of standard racks including 400 x 400mm and 14" x 14".



**Quality
Endorsed
Company**


Head Office
ISO9002 Lic 2900
Standards Australia

Simple Automatic Operation: Mains pressure driven wash and rinse systems with rotating upper and lower arms and angled jets provide excellent wash results every time. Push buttons provide fully automatic operation with either a hot cycle or a hot cycle followed by a cooling cycle. Detergent injection is preprogrammed. The thermostatically controlled boost heater is interlocked to the machine operation to ensure correct sanitising temperatures. (Conforms to NSW Health Department and proposed ANZFA Regulations). Safety controls prevent operation with the door open.

Simple Low Cost Installation: Just connect the inlet hoses to hot or hot and cold taps, connect the outlet to a drain, and plug the cord into a 15 amp 240 volt power point. The compact cabinet size of the 'CI-3B' allows easy positioning on the bench-top or under-bar for convenience and optimum space saving.

Plumbing Safety Approved: The 'CI-3B' has a water consumption of just 6.0 litres for the wash/rinse cycle and 7.5 litres for the wash/hot rinse/cold rinse cycle.

Quality Manufacture and Easy-care Design: The Eswood 'CI-3B' cabinet is manufactured in easy-care stainless steel, while all other components exposed to water or detergent are manufactured from selected long-life stainless steel, non-ferrous or synthetic materials. Eswood's commitment to quality manufacturing systems and on-going customer support ensures your investment provides the most reliable and satisfying service.

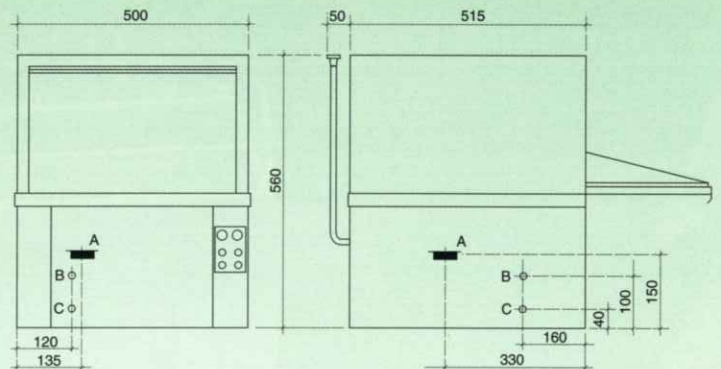

A. Drain 2" BSP gravity.

B. Hot Water Supply 3/4" BSP. 65°C at 260 to 420 kPa. (37 to 60 psi).

C. Cold Water Supply 3/4" BSP at 260 to 420 kPa. (37 to 60 psi). Cooling cycle option.

NOTE: If final cooling cycle option not required, cap off entry C.

www.eswood.com.au

ESWOOD AUSTRALIA PTY. LTD.

A.C.N. 002 481 521

Head Office: 134 Gipps Road, Smithfield NSW 2164
Telephone (02) 9604 7333. Facsimile (02) 9604 5420.

Vic (03) 9553 1355. Qld (07) 3891 1466.

SA (08) 8238 3423. WA (08) 9456 0559.

Distributors: ACT (02) 6280 4088. Tas (03) 6234 8300.

Proudly Distributed by

Publication ESW7120.0800

We continually strive to improve all Eswood products, therefore specifications may be amended from those printed in this brochure without notice.