

# Industrial Cylinder Heated Drying Ironers LSR 3500, LSR 5000



## FEATURES


- Large surface contact with linen over an angle of 300°
- Chrome-plated cylinder for a better thermal conduction
- Finger protection and emergency button for more safety
- Durable NOMEX ironing belts
- Automatic cooldown
- Easy to operate microprocessor:  
20 pre-set ironing programmes
- Indication of ironing speed and temperature
- Reverse mode possible
- Frequency controlled motor
- Easy to remove lint filters
- Space saving installation against the wall is possible: front return
- Electric, gas or steam heating

## OPTIONS

- Coin operated version
- Foot pedal for easy start and stop operation

TYPE		LSR 3514	LSR 3516	LSR 3520	LSR 5016	LSR 5020	LSR 5025	LSR 5032
<b>ROLLER DIAMETER</b>	mm	350	350	350	500	500	500	500
<b>USEFUL ROLLER LENGHT</b>	mm	1400	1600	2000	1600	2000	2500	3200
<b>HEATING</b>								
Electric heating	kW	17	25	29	33	38	55	65
Gas heating	kW	26,2	30	30	30	36	52	66
Steam heating	kg/h	27	32	40	36	49	68	88
<b>MOTOR</b>								
Roller motor	kW	0,37	0,37	0,37	0,37	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	0,18/0,255	0,18/0,255	0,18/0,255	0,18/0,255	2x0,18/0,255	2x0,18/0,255
<b>IRONING CAPACITY*</b>								
Electrical & Gas heating	kg/h	50	60	65	65	80	95	120
Steam heating	kg/h	60	75	80	80	95	115	145
<b>ROLLER SPEED</b>	m/min.	1,5-8	1,5-8	1,5-8	1,5-8	1,5-8	1,5-8	1,5-8
<b>ELECTRIC CONNECTION</b>		3x208-240V 50/60Hz 3x380-415V+N 50/60Hz						
<b>DIMENSIONS</b> HxWxD	mm	1180x2150x875	1180x2350x875	1180x2750x875	1232x2350x992	1232x2750x992	1232x3350x992	1232x3950x992
<b>TRANSPORT DATA</b>								
Gross weight	kg	730	840	900	1120	1350	1500	1850
Net weight	kg	580	670	700	920	1150	1290	1590
Volume (crate packed)	m <sup>3</sup>	3,44	3,74	4,34	4,24	4,97	6,00	7,03
Crate packing HxWxD	mm	1550x2290x970	1550x2490x970	1550x2890x970	1550x2490x1100	1550x2890x1110	1550x3490x1110	1550x4090x1110

\* Tested in accordance of ISO 9398-2, The data concerning dimensions of machines include all extended parts

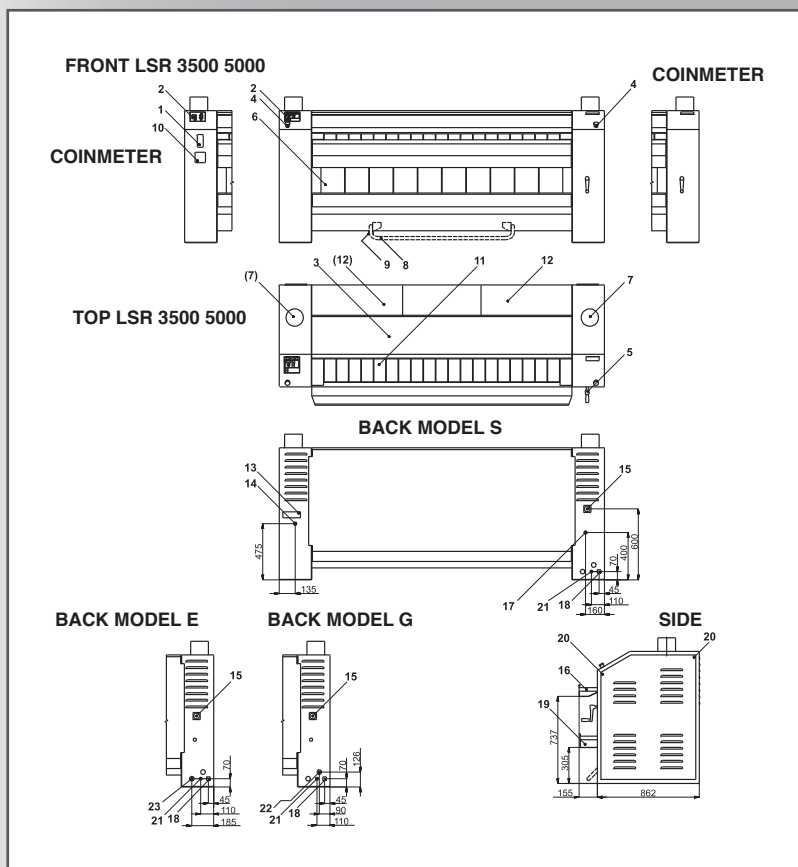

1. Coinmeter (only for version with coinmeter)
2. Control panel
3. Upper cover
4. Emergency stop
5. Manual drive of roller
6. Ironing belts
7. Exhaust ventilation (1 for LSR 3500, 2 for LSR 5000)
8. Pedal used for starting/stopping belts' movement (only for version OPL)
9. Pedal microswitch (only for version OPL)
10. Coin container (only for coin version)
11. Insertion belts/feeding table
12. Cover of fi lter sieve
13. Name plate
14. Condense drain G 3/4" (only for version "S")
15. Main switch
16. Upper trough
17. Steam supply G 3/4" (only for version "S")
18. External protective connector
19. Lower trough
20. Bolts of side cover
21. Main power supply
22. Gas supply G 3/4" (only for version "G")
23. Electric power supply for heating system (version "E" only)

Lavamac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.lavamac.eu](http://www.lavamac.eu)



05-2010/532455