

GENERAL
PURPOSE
**HB
SERIES**

SKOPE STANDARD RANGE



Plumbing-free design

Internal light

Illuminated curved sign
panel to brand and
advertise your products

Toughened safety glass door

10 Amp power supply

Providing great features
to suit everyday needs
at a low cost.


These energy efficient countertop and vertical glass door chillers have been designed simply to suit your everyday needs at a low cost.

HB80 Specifications


- Low energy consumption – uses 3.5kWh/24hrs
- Operating temperature +1°C to +4°C in 32°C ambient
- Insulation: 40/70mm thick polyurethane foam
- Refrigerant R134a
- Exterior: white powercoated on galvanised steel
- Interior: white plastic
- 10 Amp power supply
- 2 white plastic coated shelves (w405mm x d360mm) as standard
- Low/e, toughened safety glass door
- Forced air ventilation
- Automatic defrosting
- Adjustable foot stand
- Internal light
- Plumbing-free design

HB400 Specifications

- Low energy consumption – uses 5.0kWh/24hrs
- Operating temperature +1°C to +4°C in 40°C ambient
- Insulation: 30/70mm thick polyurethane foam
- Refrigerant R134a
- Interior and exterior: white powder coated on galvanised steel
- 10 Amp power supply
- 5 white plastic coated shelves (w530mm x d415mm) as standard
- Illuminated curved top sign panel
- Internal light
- Rollers and stabilising feet as standard
- Brackets for door lock as standard (lock not provided)
- Toughened safety glass door
- Warm air travels up the door to reduce condensation
- Plumbing-free design



Drawing Depicts: HB80

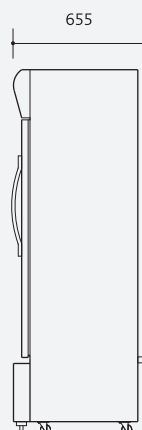

Drawing Depicts: HB400
With illuminated curved sign.

serene


from SKOPE

COUNTER TOP & SMALL VERTICAL CHILLERS


GLASS DOOR



HB80



Integral top view



Integral front elevation


Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
HB80	38	Integral	Chiller	
	External (mm)	Internal (mm)	Gross Volume	80 litres
Height*	770	630/420**	Floor Area	0.28m ²
Width	500	410		
Depth	560	400/250**		

HB80
1 DOOR




✓ High Energy Efficiency

HB400



Integral top view



Integral front elevation

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
HB400	99	Integral	Chiller	
	External (mm)	Internal (mm)	Gross Volume	350 litres
Height*	2100	1350	Floor Area	0.4m ²
Width	620	560		
Depth	655	460		

HB400
1 DOOR